



DESCRIPTION

LightSource LED CK Strip Light Conversion Kit replaces T8 and T12 fluorescent 4-foot or 8-foot strip fixtures. With over 100,000 hour life, CK fixtures provide high-quality illumination for years to come with zero maintenance costs. Constructed of commercial grade pure aluminum with a durable, composite polyester exterior finish. White is standard.

SPECIFICATIONS

Length:	4 ft.		8 ft.	
Lumens: <i>(no lens)</i>	4,172	6,877	7,764	13,540
Wattage:	30	50	60	95
Surge Protection:	2.5kV	6kV	6kV	6kV
Driver Attached:	Yes	Yes	Yes	No
Weight:	2.70 lbs.	3.00 lbs.	5.20 lbs.	5.35 lbs.
Dimensions:	1x - L 48.000" x (N) 4.25" or (W) 5.25" x H 1.87"		2x - L 48.000" x (N) 4.25" or (W) 5.25" x H 1.87"	
Color Temp:	4000K or 5000K			
CRI:	>82			
Line Voltage:	Universal 120-277V			
Power Supply:	Hardwire			
Ambient Operating Temperature:	-30° to 50° C / -22° to 122° F			
Environment:	Dry location			
Lens:	Non-glare optical grade Acrylic, resists common airborne water-based solvents. Optional without lens.			
Mount:	Universal mounting on 4.25" to 5.25" wide fixture			
Warranty:	10-year Standard Limited			
Manufacturer:	Genesis Energy Technology			
Accessories:	Motion Sensor, white or black. Sold and installed separately.			
	4 ft. pan, 4.25 in., PA-4FT425-01			
	8 ft. pan, 4.25 in., PA-8FT425-01			
Listed:	UL Classified, DLC*			




Front view. CK 4 ft. LED Strip Light Conversion Kit with Frosted lens option shown.

Back view. 4CK50 4 ft. LED Strip Light Conversion Kit with attached driver shown below.



Back view. 8CK100 8 ft. LED Strip Light Conversion Kit with separate driver shown below.

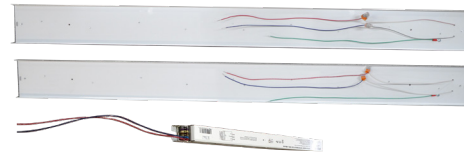

Accessories *optional*

Motion Sensor
Available in black or white



4 ft. pan accessory



8 ft. pan accessory



ORDERING INFORMATION

EXAMPLE: **4CKN50-UNF1-50WH**

Lead times and costs may vary depending on options selected. Consult your sales representative for more information.

Model	Width	Wattage (Nominal)	UN Voltage	Lens/Optics	Color Temp	Fixture Color	Nx Series
4CK: for 4 ft. fixture	N: 4.25"	30: 30W (4' only)	UN: 120-277V	F1: Frosted lens	50: 5000K	WH: White	Nx: v2.0
8CK: for 8 ft. fixture ¹	W: 5.25"	50: 50W (4' only)		NL: No lens	40: 4000K	BL: Black	
		60: 60W (8' only)					
		100: 95W (8' only)					

Specifications subject to change without notice. (N) Converts 4.25 in. wide fixtures. (W) Converts 5.25 in. wide fixtures.
¹ Consists of (2) two 4 ft. sections.



*Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.