



DESCRIPTION


Designed for quick, easy installation featuring a sleek, contemporary, ultra-compact design. Field adjustable from 6 - 60W with optional potentiometer on back of fixture. Patent-pending insect-free lens design. Over 100,000 hour life with zero maintenance costs. Constructed from commercially pure aluminum with excellent corrosion resistance. White is standard. Troffer panels in either reflective Optical White or non-reflective Matte White allow for fast, easy installation into conventional 2x4 ft. grids. No on-site assembly required.

SPECIFICATIONS

Lumens:	2,943	3,176	4,426	5,673
Wattage:	25	30	45	60
Weight:	7.35 lbs.			
Dimensions:	L 47.750" x W 23.750" x H 4.000"			
Listed/Rated:	DLC QPL, UL, IC			
DLC Model #	TLA25-UNF2-40WH-PXX TLA25-UNF2-50WH-PXX	TLA30-UNF2-40WH-PXX TLA30-UNF2-50WH-PXX	TLA45-UNF2-40WH-PXX TLA45-UNF2-50WH-PXX	TLA60-UNF2-50WH-PXX
Color Temp:	4000K. 5000K option.			
CRI:	>82			
Line Voltage:	Universal 120-277V			
Power Supply:	Hardwire standard			
Surge Protection:	Integrated 2.5kV transient voltage protection			
Ambient Operating Temperature:	-30° to 40° C / -22° to 104° F			
Environment:	Damp rated. Insulation contact rated.			
Lens:	Non-glare optical grade Acrylic. Insect-free design. Other options available.			
Mount:	2x4 ft. T-bar ceiling			
Warranty:	10-year Standard Limited			
Manufacturer:	Genesis Energy Technology			



ThinLine Architectural with its elegant, contemporary form factor that will meet or exceed aesthetic and performance requirements.

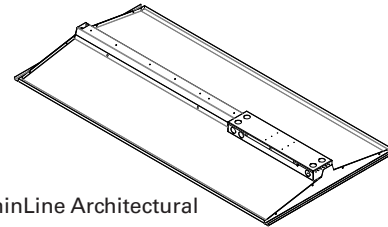

ThinLine Architectural

Tether (GTT-TL)



Hurricane clip (GHC-TL)



One GTT-TL included, attached to fixture. Additional GTT-TL & GHC-TL may be purchased separately.



ORDERING INFORMATION

EXAMPLE: **TLA25-UNF2-40WH-PMW-HW-MSX** Lead times and costs may vary depending on options selected. Consult your sales representative for more information. Standard configuration highlighted in Gray.

TLA	UN	F2	WH	P	HW				
Model	Wattage	Voltage	Optics	Color Temp	Fixture Color	Configuration	Panel Finish	Power Supply	Motion Sensor
TLA: ThinLine Architectural	25: 25W 30: 30W 45: 45W 60: 60W	UN: 120-277V	F2: White lens	40: 4000K 50: 5000K	WH: White	P: Panel	MW: Matte white WH: Optical white gloss	HW: Hardwire	MSX: None P: Potentiometer ¹ (dimming knob on back of fixture)

Specifications subject to change without notice.
¹ Dimming down to 6W with optional potentiometer