



Date:	
Type:	
Firm:	
Project:	

PRODUCT DESCRIPTION

Reduce wattage by up to 80%. The energybank LED Wall Pack is a perfect complement to the model T® exterior fixture. Using our patent-pending advanced light engine technology and proprietary optics you will get both 100,000 hour life and exceptional illumination. With its powder coat exterior finish, it will deliver years of trouble free service. Light quality and housing color match the model T® perfectly. Fast, easy-to-install design.

PERFORMANCE SUMMARY

Light Engine: Osram driver and Nichia LED COBs

Color Temp: 5000K

CRI: >82 + R9

Rated lifetime: 100,000 hours

Input Voltage: 120-277V

Optics: Type III forward-throw hammertone reflector

Operating Temp: -40° to 50° C

Warranty: 5-year standard limited

Certification: UL listed, DLC QPL

Manufacturer: Genesis Energy Technology

ORDERING INFORMATION

Determine part number* for placing order.

EXAMPLE: WP80-UNCG-HMBL-SBMSX

Lead times will vary depending on options selected. Consult your sales representative.

	WP	UN	CG	HM		SB		
	Model	Wattage (nominal)	Voltage	Optics Lens	Reflector	Fixture Color	Mounting	Motion
STANDARD IN YELLOW	WP: wall pack	60: 60 watt	UN: 120-277V	CG: clear glass	HM: hammer-tone	BL: black	SB: standard wall bracket	DD: Dusk to Dawn sensor
		80: 80 watt				WH: white		MSC: motion sensor
						BZ: bronze		MSX: no sensor
						GR: gray		

*For additional custom options, call your sales representative for details. additional charges may apply to non-standard options



WP

Wall Pack LED





WP80-UNCG-HMBZ-SBMSX shown above

L 13.531 in

H 6.764 in

W 14.666 in

14.8 lbs

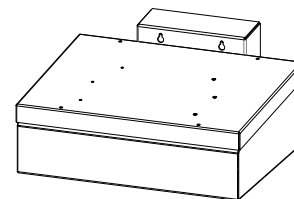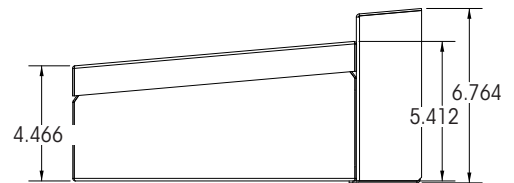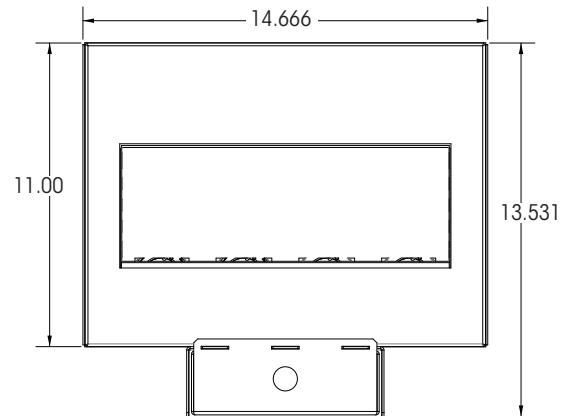

AMERICAN MADE INNOVATION

Wall Pack LED
STANDARD SPECIFICATIONS:

		WP60	WP80
spec	details		
	power consumption	60W	80W
input voltage	120-277v		
surge suppression	Integral 2.5kV transient voltage protection		
power supply	Hardwire		
motion	Dusk to dawn sensor		
color temp	5000K		
CRI	>82 + R9		
lifetime	100,000 hours		
operating temp	-40° to 50° C -40° to 131° F		
optics	Type III forward-throw hammertone reflector		
driver	Osram		
LED COBs	Osram		
dimensions (L"xH"xW")	13.531" L 6.764" H 14.666" W		
weight	14.18 lbs		
housing	Galvanneal		
finish	Automotive grade exterior finish colors: Black, Bronze, White, Gray		
mounting	Standard wall bracket		
certification	UL Listed		
	DLC QPL		
warranty	5-year standard limited		
environment	Built to UL Wet Rated standards		
DLC*	DLC Agency Reference #	WP60-UNCG-HMxx WP60-UNCG-MRxx	WP80-UNCG-HMxx WP80-UNCG-MRxx
	manufacturer:	Genesis Energy Technology	



*Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.