



DESCRIPTION

Optimized optics that are sealed to prevent entry by particulate matter and insects, and advanced thermal management with a patent-pending air-to-air heat exchanger, make the OmegaLight Linear 2.0 luminaire the high-performance LED fixture you have been looking for. Constructed of commercially pure aluminum. 100,000 hour life for maintenance-free, exceptional illumination. Fast, easy-to-install design. Easily replaces HID, T8 and T5 fluorescent. Designed and built in the USA to deliver superior quality light where you need it.


SPECIFICATIONS

Style:	2-array	
Wattage:	180	210
Lumens: (without lens)	28,080	32,760
Weight: (lbs)	9.25	9.55
Dimensions:	L 46.10" x W 7.00" x H 3.10"	
Ambient Operating Temperature:	-30° to 50° C -22° to 122° F	-30° to 45° C -22° to 113° F
Color Temp:	5000K	
CRI:	80	
Line Voltage:	Universal 120-277V standard	
Power Supply:	Hardwire standard	
Surge Protection:	Integrated 6kV transient voltage protection standard. Optional internal 10kA surge protection.	
Environment:	Damp rated	
Lens:	Frosted lens standard. No lens optional.	
Mount:	V-Hook standard. Optional 10 ft. adjustable hanging cable.	
Controls:	Optional RJ45 communication, RIB relay, motion sensor. FUSION™ compatible.	
Warranty:	10-year Standard Limited	
Manufacturer:	Genesis Energy Technology (A wholly-owned subsidiary of Energy Bank Inc.)	

Specifications subject to change without notice. Longer lead times may apply when ordering options over standard.



2-array

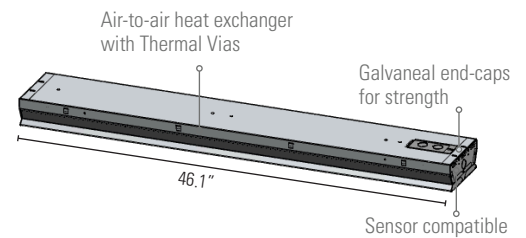

V-Hook Hangers (Standard)

Accessories



10 ft. Hanging Cable



Motion Control Sensor



RJ45 Connecting Plate



Conduit Mounting Brackets

(Used for dimming only, not AC power)

