

model T[®]
Footcandle Plots
300W – 400W – 600W



energybank. LED Done Right[®]



300W model T[®] Mini

FOOTCANDLE PLOTS

Mounting Height: 23'. Footcandle numbers are on a 10' x 10' grid.

FOOTCANDLE COLOR KEY


Green is >50 FC

Blue is between 30 - 50 FC


Orange is between 10 - 30 FC

Black is <10 FC

model T[®] Mini 300W - Forward Throw Model

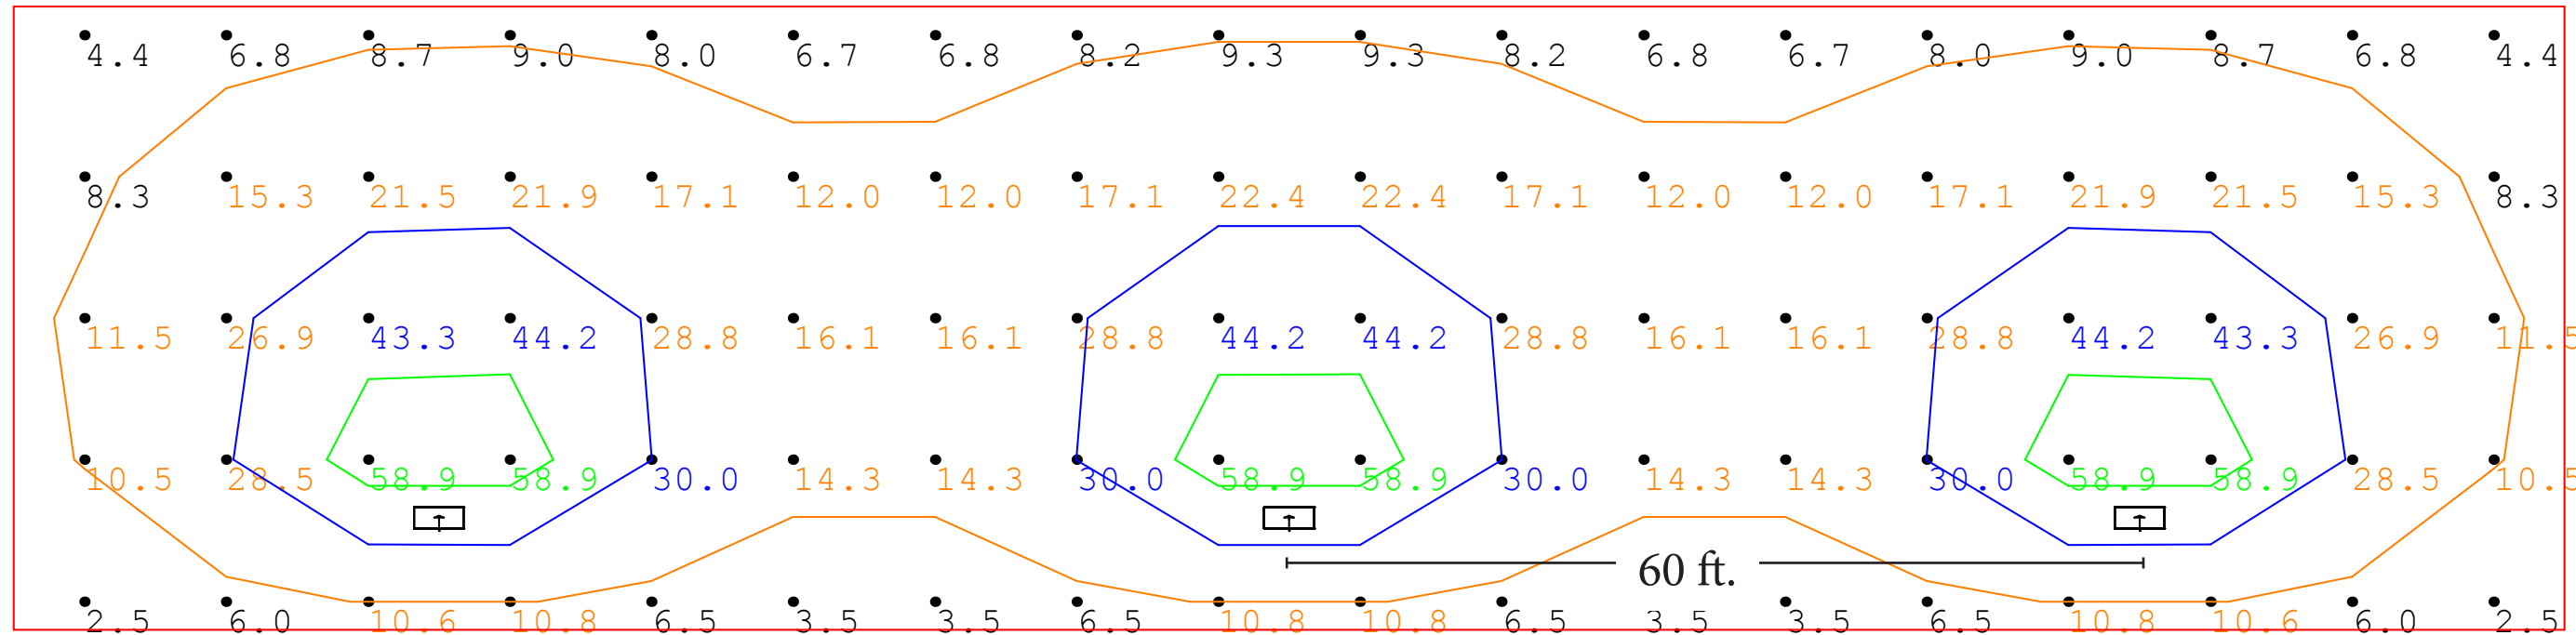

model T[®] Mini 300W - Bi-Directional Model

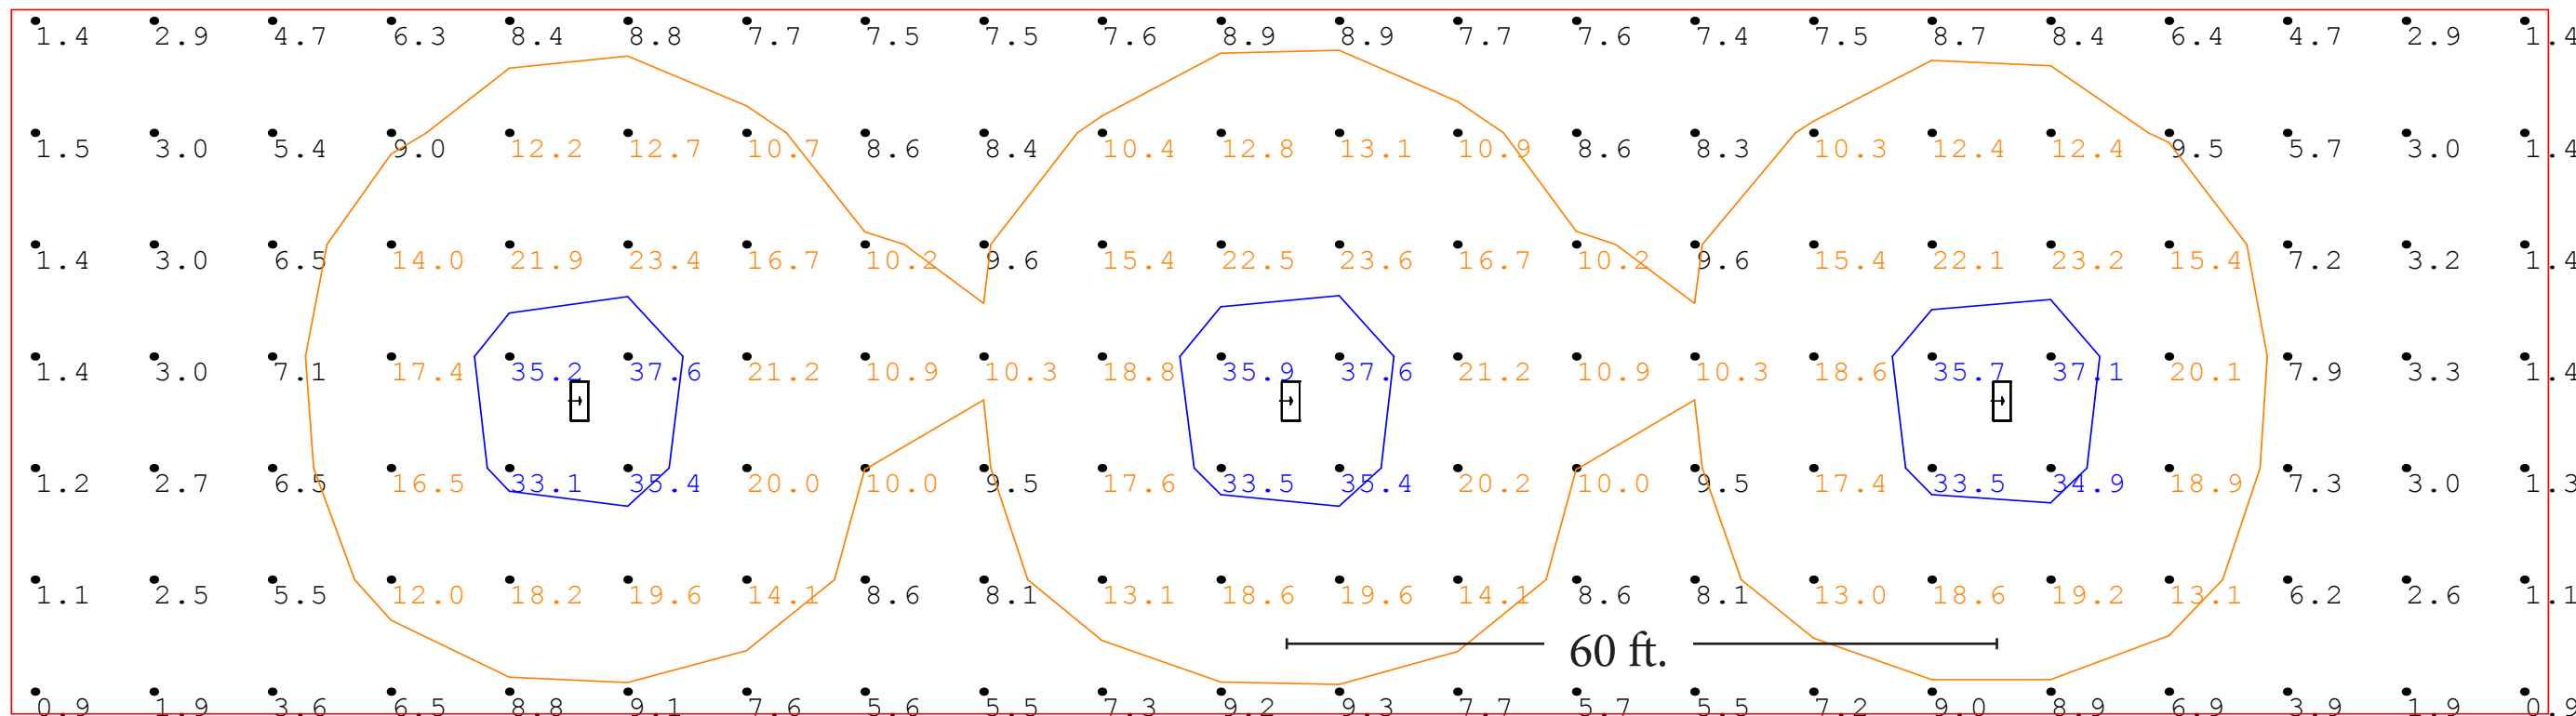



400W model T[®]

FOOTCANDLE PLOTS

Mounting Height: 23'. Footcandle numbers are on a 10' x 10' grid.

FOOTCANDLE COLOR KEY


Green is >50 FC

Blue is between 30 - 50 FC

Orange is between 10 - 30 FC


Black is <10 FC

model T[®] 400W - Forward Throw Model

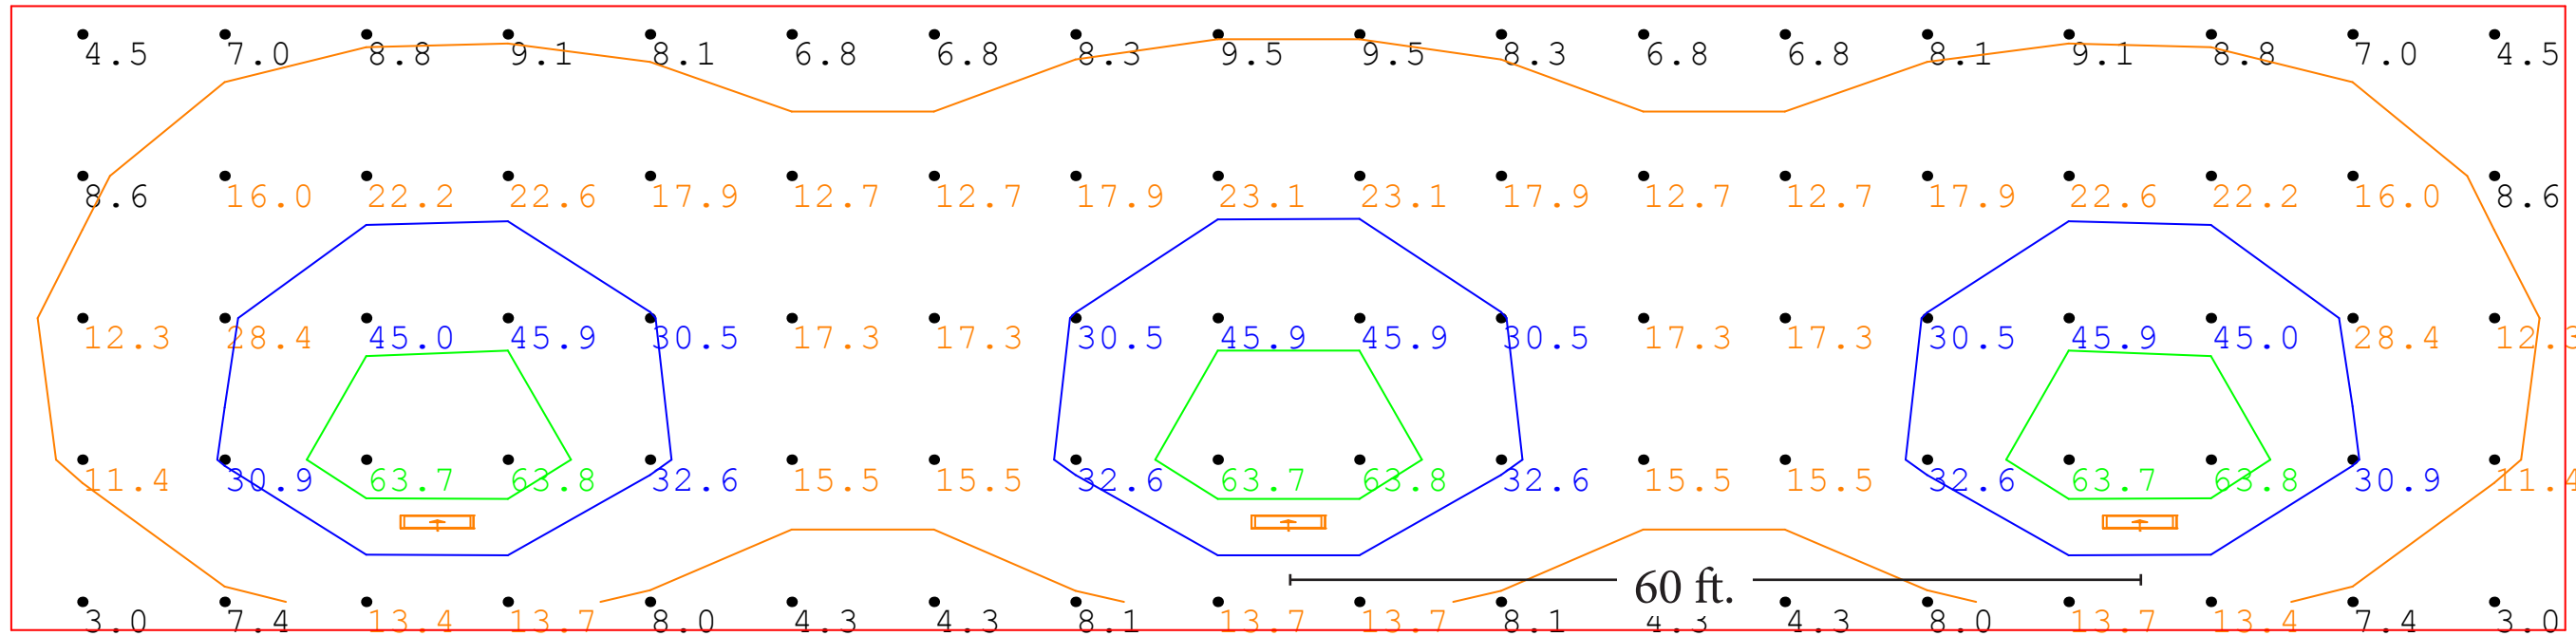

Average = 20.03
Maximum = 63.8
Minimum = 3.0

model T[®] 400W - Bi-Directional Model

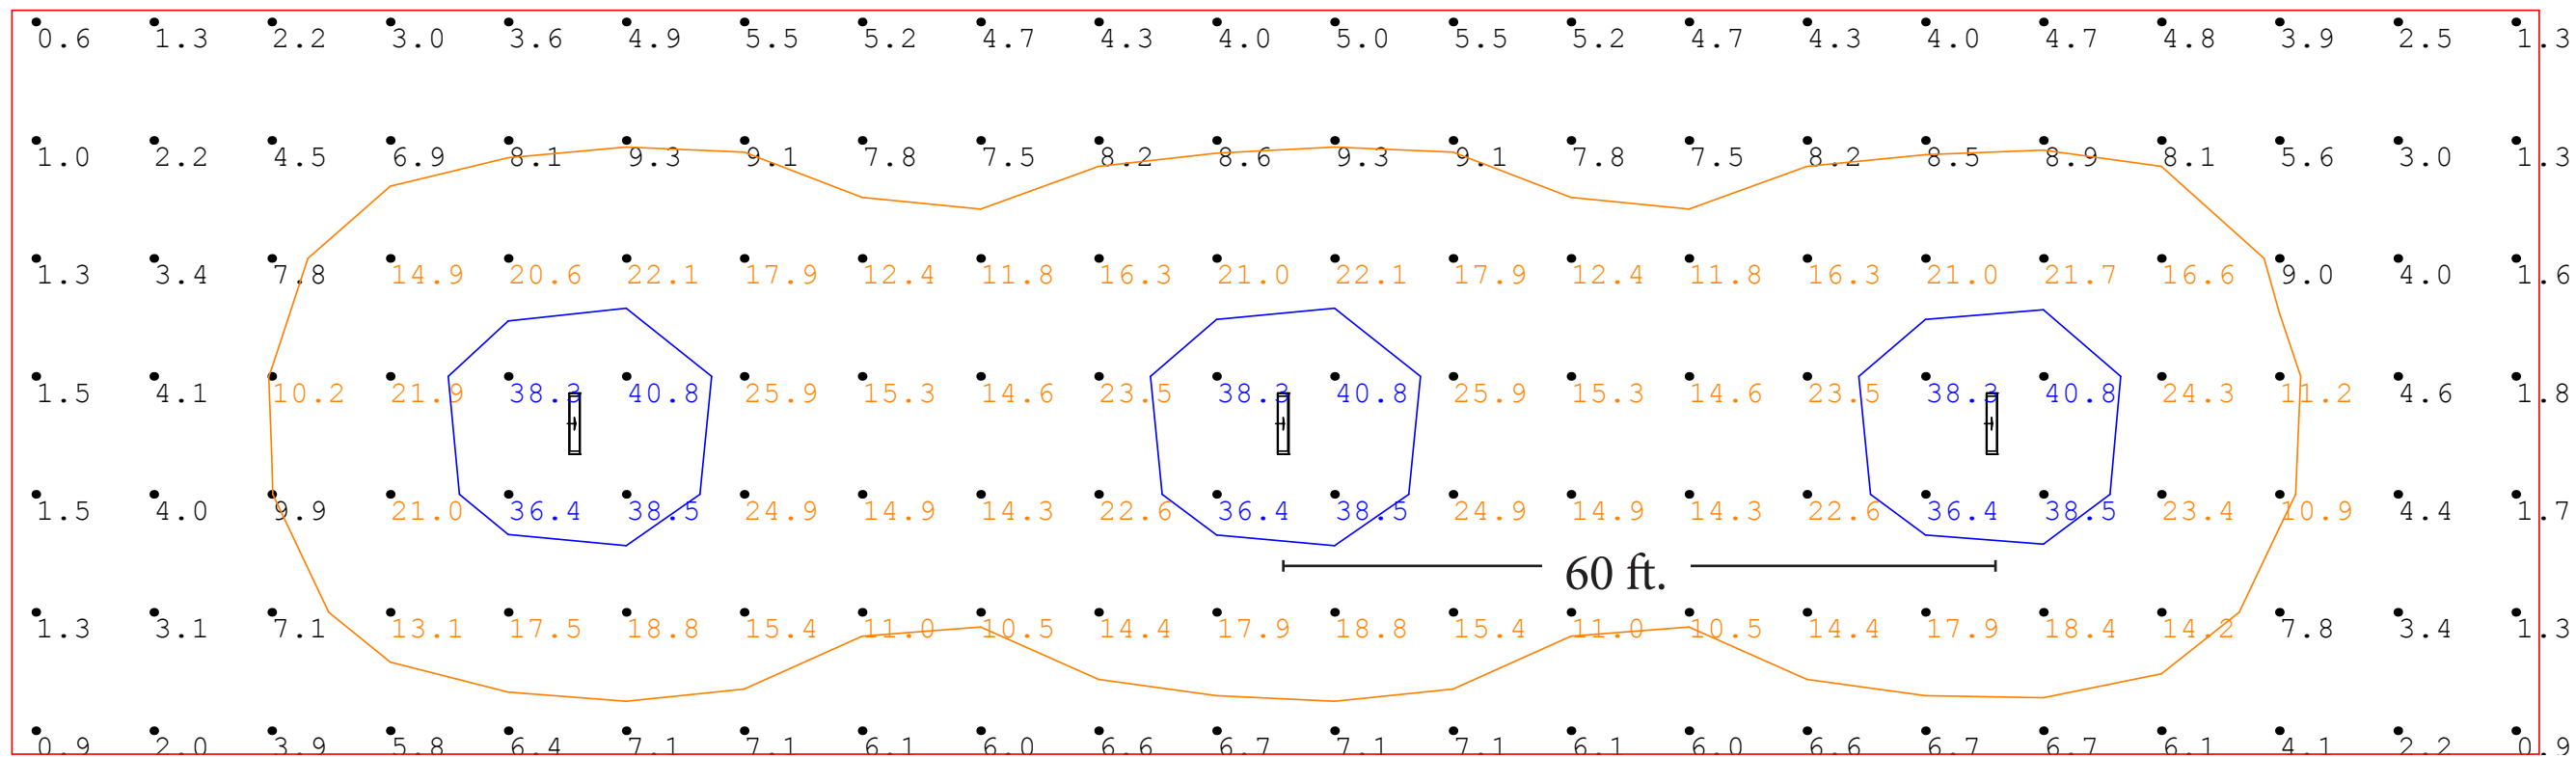

Average = 12.02
Maximum = 40.8
Minimum = 0.6



600W model T[®]

FOOTCANDLE PLOTS

Mounting Height: 23'. Footcandle numbers are on a 10' x 10' grid.

FOOTCANDLE COLOR KEY


Green is >50 FC

Blue is between 30 - 50 FC

Orange is between 10 - 30 FC


Black is <10 FC

model T[®] 600W - Forward Throw Model

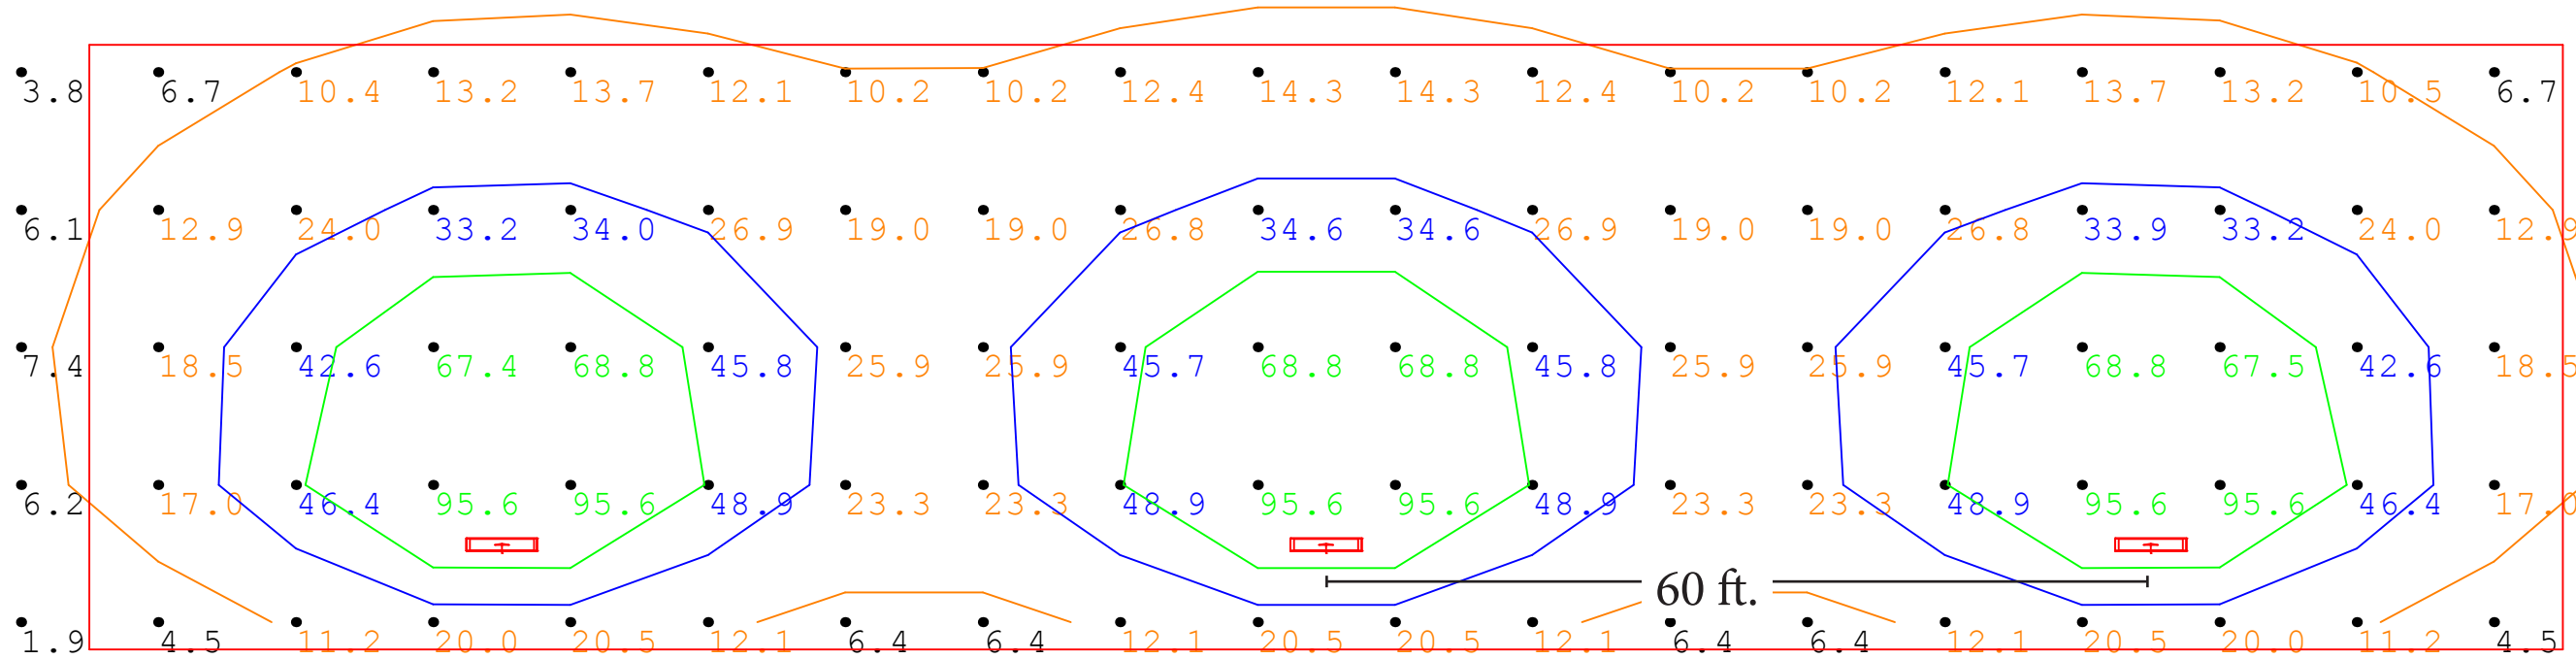

Average = 30.03
 Maximum = 95.6
 Minimum = 4.5

model T[®] 600W - Bi-Directional Model

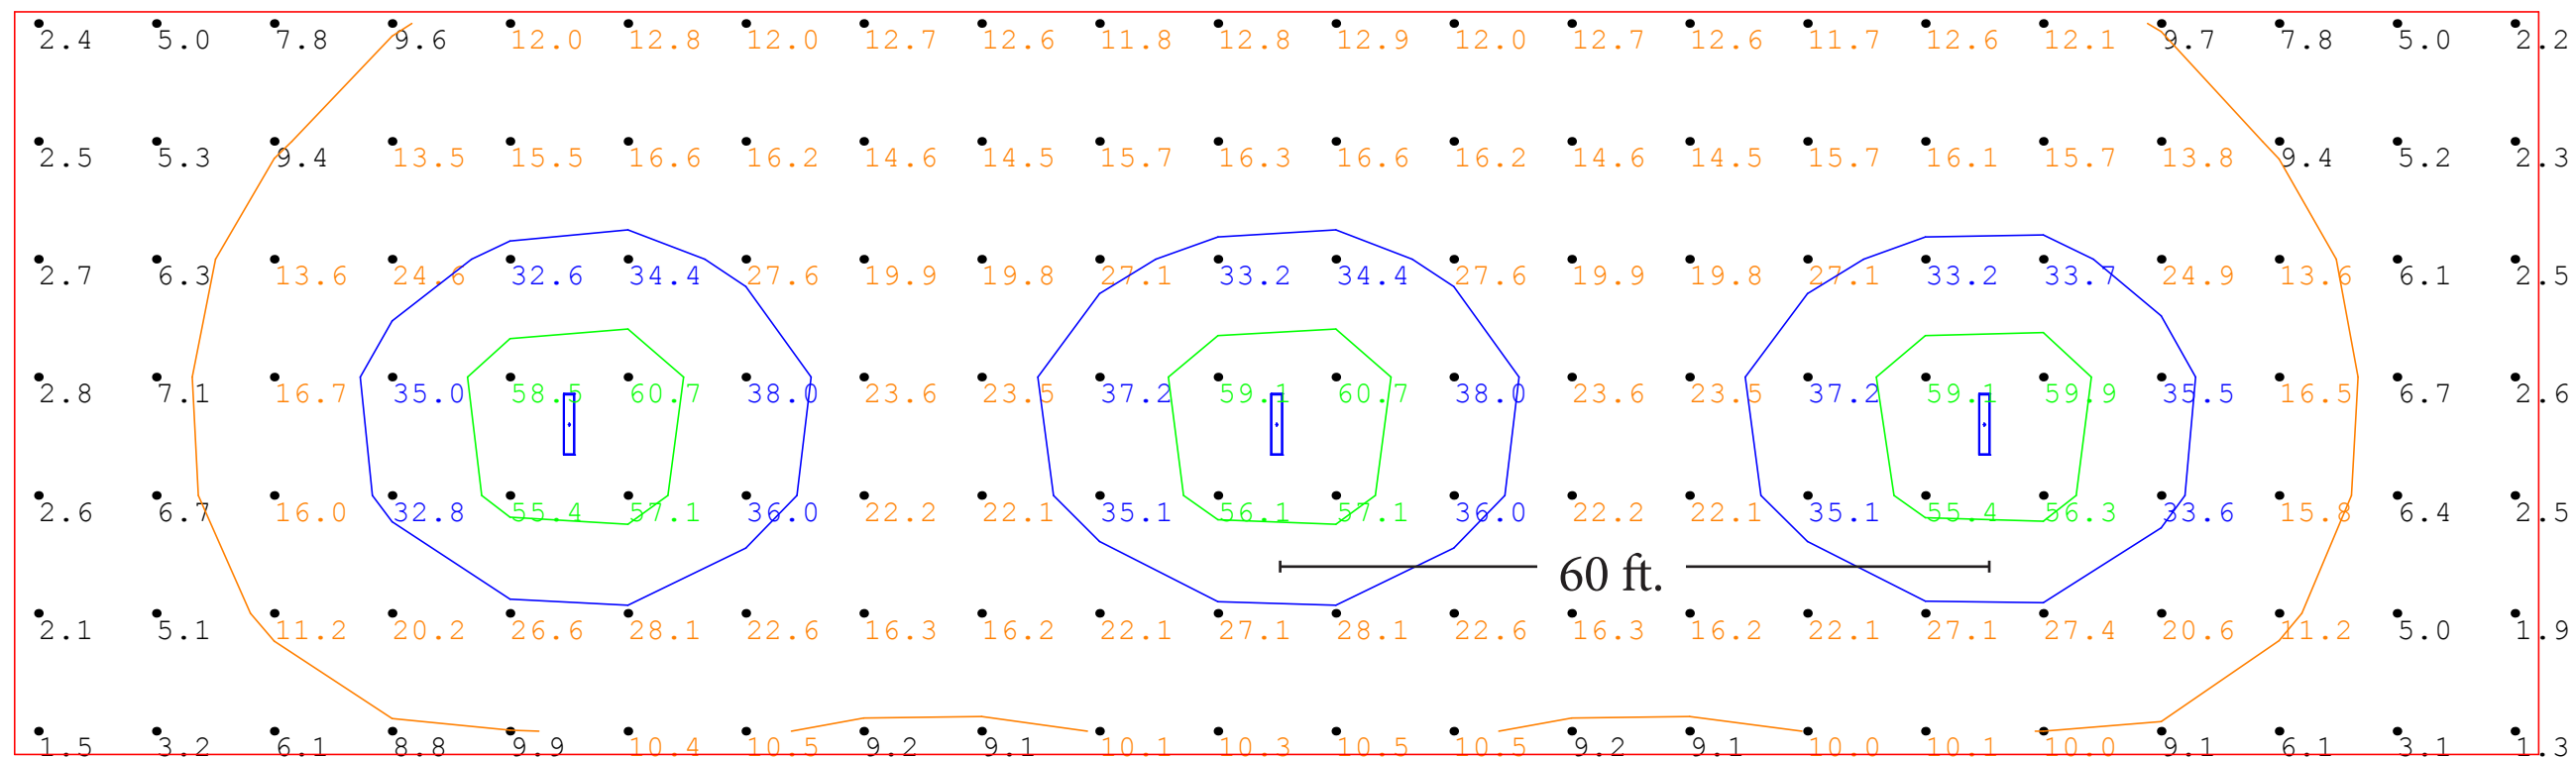

Average = 19.30
 Maximum = 60.7
 Minimum = 1.3

