



DESCRIPTION


Designed for quick, easy installation featuring a sleek, contemporary, ultra-compact design. Field adjustable from 6 - 30W with optional potentiometer on back of fixture. Patent-pending insect-free lens design. Over 100,000 hour life with zero maintenance costs. Constructed commercially pure aluminum with a durable, composite polyester exterior finish. White is standard. Troffer panels in either reflective Optical White or non-reflective Matte White allow for fast, easy installation into conventional 2x2 ft. grids. No on-site assembly required.

SPECIFICATIONS


Lumens:	3,176
Wattage:	30
Weight:	6.00 lbs.
Dimensions:	L 23.750" x W 23.750" x H 4.000"
Listed/Rated:	IC
Color Temp: 4000K. 5000K option.	
CRI: >82	
Line Voltage: Universal 120-277V	
Power Supply: Hardwire standard	
Surge Protection: Integrated 2.5kV transient voltage protection	
Ambient Operating Temperature: -30° to 40° C / -22° to 104° F	
Environment: Damp rated. Insulation contact rated.	
Lens: Non-glare optical grade Acrylic white lens. Insect-free design.	
Mount: 2x2 ft. T-bar ceiling	
Warranty: 5-year Standard Limited	
Manufacturer: Genesis Energy Technology	



ThinLine Architectural 2x2 with its elegant, contemporary form factor designed for easy installation into 2x2 grid ceilings.

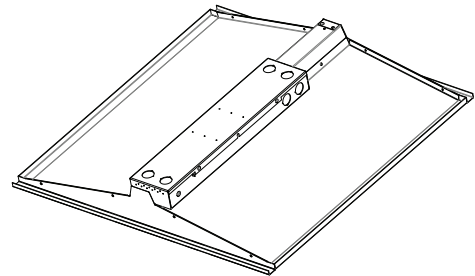

ThinLine Architectural 2x2



Tether (GTT-TL)

Hurricane clip (GHC-TL)



One GTT-TL included, attached to fixture. Additional GTT-TL & GHC-TL may be purchased separately.

AMERICAN INNOVATION



Designed & Built in USA



ORDERING INFORMATION

EXAMPLE: **TLA230-UNF2-40WH-PMW-HW-MSX** Lead times and costs may vary depending on options selected. Consult your sales representative for more information. Standard configuration highlighted in Gray.

TLA2	30	UN	F2		WH	P		HW	
Model	Wattage	Voltage	Optics	Color Temp	Fixture Color	Configuration	Panel Finish	Power Supply	Motion Sensor
TL2A: ThinLine Architectural 2x2	30: 30W	UN: 120-277V	F2: White lens	40: 4000K 50: 5000K	WH: White	P: Panel	MW: Matte white WH: Optical white gloss	HW: Hardwire	MSX: None P: Potentiometer ¹ (dimming knob on back of fixture)

Specifications subject to change without notice.
¹ Dimming down to 6W with optional potentiometer