




## DESCRIPTION

LightSource LED CK Strip Light Conversion Kit replaces T8 and T12 fluorescent 4-foot or 8-foot strip fixtures. With over 100,000 hour life, CK fixtures provide high-quality illumination for years to come with zero maintenance costs. Constructed of commercial grade pure aluminum with a durable, composite polyester exterior finish. White is standard.

## SPECIFICATIONS

<b>Length:</b>	4 ft.		8 ft.	
<b>Lumens:</b> <i>(no lens)</i>	4,172	6,877	7,764	13,540
<b>Wattage:</b>	30	50	60	95
<b>Surge Protection:</b>	2.5kV	6kV	6kV	6kV
<b>Driver Attached:</b>	Yes	Yes	Yes	No
<b>Weight:</b>	2.70 lbs.	3.00 lbs.	5.20 lbs.	5.35 lbs.
<b>Dimensions:</b>	1x - L 48.000" x (N) 4.25" or (W) 5.25" x H 1.87"		2x - L 48.000" x (N) 4.25" or (W) 5.25" x H 1.87"	
<b>Color Temp:</b>	4000K or 5000K			
<b>CRI:</b>	>82			
<b>Line Voltage:</b>	Universal 120-277V			
<b>Power Supply:</b>	Hardwire			
<b>Ambient Operating Temperature:</b>	-30° to 50° C / -22° to 122° F			
<b>Environment:</b>	Dry location			
<b>Lens:</b>	Non-glare optical grade Acrylic, resists common airborne water-based solvents. Optional without lens.			
<b>Mount:</b>	Universal mounting on 4.25" to 5.25" wide fixture			
<b>Warranty:</b>	5-year Standard Limited			
<b>Manufacturer:</b>	Genesis Energy Technology			
<b>Accessories:</b>	Motion Sensor, white or black. Sold and installed separately.			
	4 ft. pan, 4.25 in., PA-4FT425-01			
	8 ft. pan, 4.25 in., PA-8FT425-01			
<b>Listed:</b>	UL Classified, DLC			

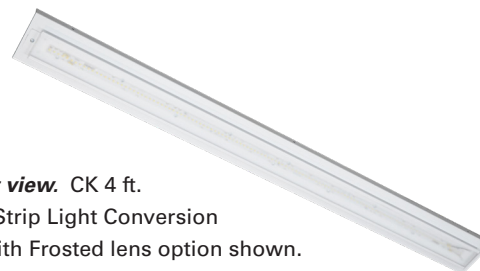


**Front view.** CK 4 ft. LED Strip Light Conversion Kit with Frosted lens option shown.

**Back view.** 4CK50 4 ft. LED Strip Light Conversion Kit with attached driver shown below.



**Back view.** 8CK100 8 ft. LED Strip Light Conversion Kit with separate driver shown below.

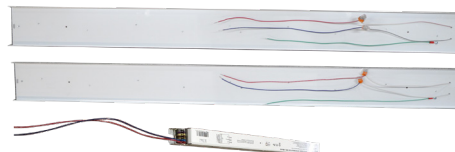

### Accessories optional

#### 4 ft. pan accessory



#### 8 ft. pan accessory



## ORDERING INFORMATION

EXAMPLE: **4CKN50-UNF1-50WH**

Lead times and costs may vary depending on options selected. Consult your sales representative for more information.

Model	Width	Wattage (Nominal)	UN Voltage	Lens/Optics	Color Temp	Fixture Color	Nx Series
<b>4CK:</b> for 4 ft. fixture	<b>N:</b> 4.25"	<b>30:</b> 30W (4' only)	<b>UN:</b> 120-277V	<b>F1:</b> Frosted lens	<b>50:</b> 5000K	<b>WH:</b> White	<b>Nx:</b> v2.0
<b>8CK:</b> for 8 ft. fixture <sup>1</sup>	<b>W:</b> 5.25"	<b>50:</b> 50W (4' only)		<b>NL:</b> No lens	<b>40:</b> 4000K	<b>BL:</b> Black	
		<b>60:</b> 60W (8' only)					
		<b>100:</b> 95W (8' only)					

Specifications subject to change without notice. (N) Converts 4.25 in. wide fixtures. (W) Converts 5.25 in. wide fixtures. <sup>1</sup> Consists of (2) two 4 ft. sections.

