


LED HIGH BAY

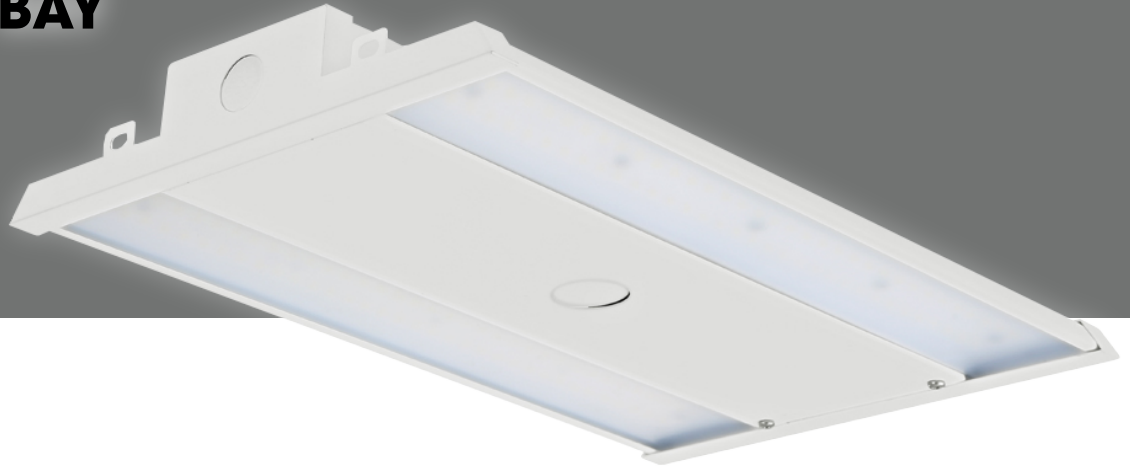

PRODUCT DESCRIPTION

The LightSource® LED linear high bay is designed for a variety of applications and mounting heights. Wide angle optics, multiple lumen packages and color temperatures make it ideal for industrial, commercial, manufacturing, gymnasium and other applications, that utilize traditional linear fluorescent and HID fixtures.

PRODUCT FEATURES

- 50,000 hour life expectancy
- Optimal zonal cavity light distribution
- Inputs voltage range: 120-277V & 347/480V, 50-60 Hz.



ORDERING INFORMATION

Example: **LSMLH06210W27VDDKCD**


Fixture Type	Wattage	Voltage	CCT	Lens	Sensor (Option)	Emergency Battery	Surge Protector
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
LSMLH06 Linear high bay series	210W 225W	27V 120-277V 48V 347/480V	DDK Adjustable Color Temperature	CD Clear Diffuser PD Prismatic Diffuser FD Frosted Diffuser	M PIR Sensor Blank Without Sensor	B Emergency Battery Blank Without Emergency Battery	S With Surge Protector Blank Without Surge Protector

PERFORMANCE DATA


SYSTEM WATTS	VOLTAGE	LENS	LUMENS 4000K(70CRI)	LPW 4000K(70CRI)	LUMENS 5000K(70CRI)	LPW 5000K(70CRI)
210W	120-277VAC	Clear Diffuser	30000lm	143lm/W	30000lm	143lm/W
		Prismatic Diffuser	27930lm	133lm/W	27930lm	133lm/W
		Frosted Diffuser	27300lm	130lm/W	27300lm	130lm/W
225W	347/480VAC	Clear Diffuser	31000lm	138lm/W	31000lm	138lm/W
		Prismatic Diffuser	30000lm	133lm/W	30000lm	133lm/W
		Frosted Diffuser	29500lm	131lm/W	29500lm	131lm/W

ADJUSTABLE LUMEN OUTPUT


SETTING	SYSTEM ATTS	VOLTAGE	LENS	LUMENS 4000 K(70CRI)	LPW 4000 K(70CRI)	LUMENS 5000 K(70CRI)	LPW 5000 K(70CRI)
100%	210W	120-277VAC	Clear Diffuser	30000 lm	142lm/W	30000 lm	142lm/W
80%	180W	120-277VAC	Clear Diffuser	25000 lm	139lm/W	25000 lm	139lm/W
60%	130W	120-277VAC	Clear Diffuser	20000 lm	154lm/W	20000 lm	154lm/W
40%	90W	120-277VAC	Clear Diffuser	13600 lm	151lm/W	13600 lm	151lm/W

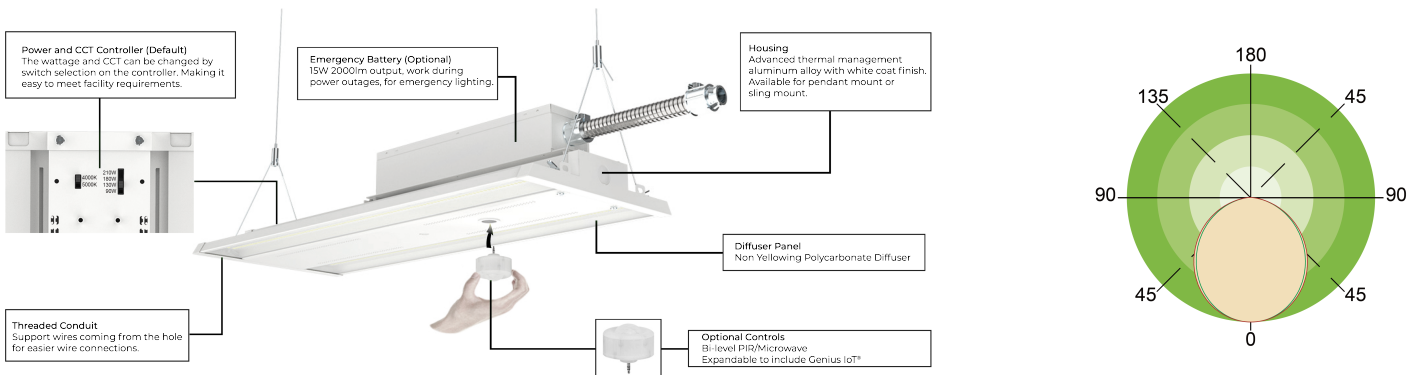

ACCESSORIES

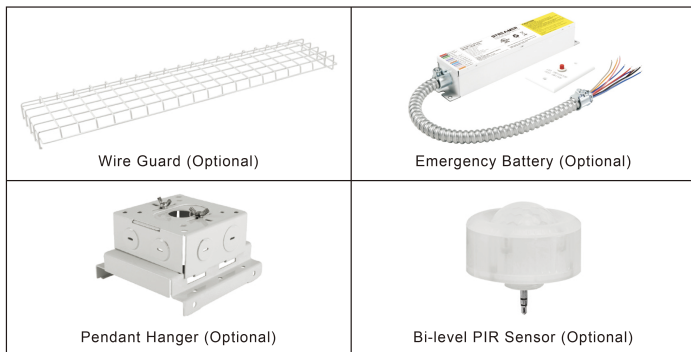

DIMENSIONS

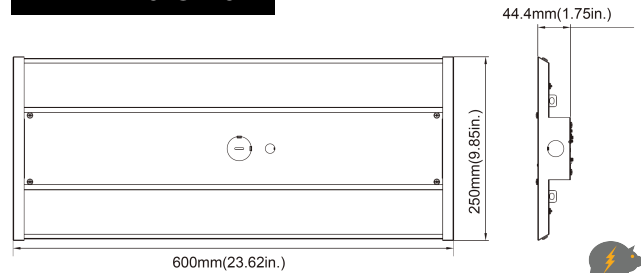


energybank.
www.energybankinc.com
info@energybankinc.com
 (920) 682-6220