




DESCRIPTION

LightSource® Task LED can replace incandescent, T8 and T12 fluorescent task fixtures. With over 100,000 hour life, Task fixtures provide high-quality illumination for years to come with zero maintenance costs. Task fixtures are designed for quick and easy installation. Constructed of commercially pure aluminum with a durable, composite polyester finish. Black is standard.


SPECIFICATIONS

Lumens:	3,450	4,600	5,750	6,507
Wattage:	30	40	50	60
Weight:	3.06 lbs.			
Dimensions:	L 48.102" x W 4.375" x H 2.012"			
Listed/Rated:	UL			DLC QPL, UL
DLC Model #				LSL060-1UNF2-50xx
Color Temp: 5000K				
CRI: >82				
Line Voltage: Universal 120-277V				
Power Supply: Hardwire standard				
Surge Protection: Integrated 2.5kV transient voltage protection				
Ambient Operating Temperature: -30° to 40° C / -22° to 104° F (@ 60W)				
Environment: Damp rated				
Lens: Non-glare optical grade Acrylic, resists common airborne water-based solvents. Other options available.				
Mount: 10 ft. Adjustable V-hook hangers included. Other options available.				
Warranty: 10-year Standard Limited				
Manufacturer: Genesis Energy Technology				

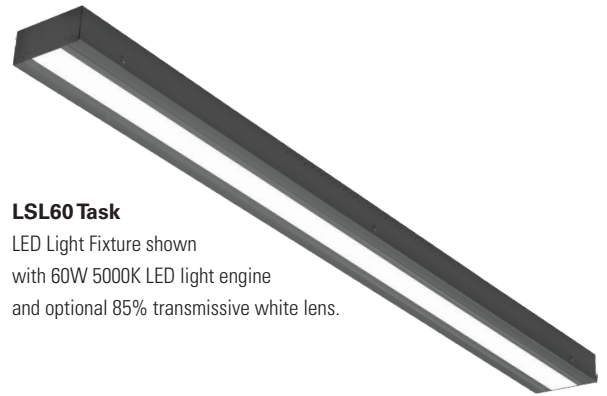

LSL60 Task

LED Light Fixture shown with 60W 5000K LED light engine and optional 85% transmissive white lens.

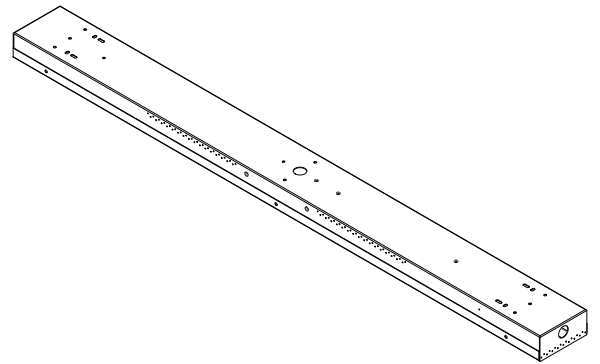

Designed & Built in USA



*Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

ORDERING INFORMATION

EXAMPLE: **LSL60-1UNF2-50BL-NSHW-V10** Lead times and costs may vary depending on options selected. Consult your sales representative for more information. Standard configuration highlighted in Gray.

LSL	1	UN				NS			V10	
Model	Wattage Code (Nominal)	Length	Voltage	Optics/Lens	Color Temp	Fixture Color	Surge	Power Supply	Control	Mounting
LSL: Task	30: 30W 40: 40W 50: 50W 60: 60W	1: 4 ft.	UN: 120-277V	F2: White lens F1: Frosted lens CL: Clear lens	50: 5000K 40: 4000K	BL: Black WH: White	NS: 2.5kV int.	HW: Hardwire C1: NEMA 5-15P straight blade plug	PTR: Potentiometer ¹	V10: V-Hook with 10' adj. cables CM: Ceiling Mount

Specifications subject to change without notice.

¹Can adjust wattage from 6W to 60W when using optional potentiometer.